

## SBP Series IP Digital Clock (V3)



### Highlights



- Available in Power over Ethernet (802.3af protocol)
  - Power and synchronize clocks through one Ethernet cable
- Extremely intuitive web interface built in
  - Control all of your settings like Daylight Saving Time and countdown functions through an easy-to-use web interface
  - Set dimming schedules for digital clocks
- Monitor your entire clock system!
  - View the status of your clock to ensure it's communicating
  - Edit a specific clock's settings or apply settings to the entire clock system through one location
- Available in different sizes
  - 2.5" (6.35 cm) display
  - 4" (10.16 cm) display
  - 4 digit display
  - 6 digit display
- Automatic bi-annual daylight saving time
- 12 or 24 hour display
- Configurable alternating time/date in both American and European formats
- Four levels of adjustable brightness
- Microprocessor based
- Made in the U.S.A.

# SBP Series IP Digital Clock (V3)

## Specifications




- Display Size: 2.5" (6.35 cm) and 4.0" (10.16 cm)
- Display Color: Vibrant Red
- Number of Digits: 4 digit or 6 digit
- Visibility: 100 ft. (30.48 m) - 2.5" (6.35 cm) model  
250 ft. (76.2 m)- 4.0" (10.16 cm) model
- Bezel Color: Anti-glare red
- Bezel Size: (LxW) 4.69" (11.91 cm) x 10.31" (26.19 cm)  
- 2.5" clock, 4 digit  
6.75" (17.15 cm) x 13.31" (33.8 cm)  
- 4.0" clock, 4 digit  
4.69" (11.91 cm) x 13.56" (34.44 cm)  
- 2.5" clock, 6 digit  
6.75" (17.15 cm) x 18.31" (46.5 cm)  
- 4.0" clock, 6 digit
- Temperature Range  
Operating: 0°C - 45°C  
Storage: -15°C - 75°C
- Input voltage: 48 VDC via PoE

- Average current consumption: (maximum brightness) 2.5" (6.35 cm) 4 and 6 Digit Clock 125 mA @ PoE  
4.0" (10.16 cm) 4 and 6 Digit Clock 175 mA @ PoE
- Signal Input: (S)NTP
- Display Format: 12 or 24 hour mode
- Brightness: Two levels, adjustable
- Mounting: Flush, wall or double mount
- Compliance: UL, cUL, CE pending

## Ordering Information




### SBP Series IP Digital Clock



**Example:**  
 SBP-313-254-0                      2.5" (6.35 cm) Clock, 4 Digit, PoE  
 SBP-313-406-0                      4.0" (10.16 cm) Clock, 6 Digit, PoE


### Housings

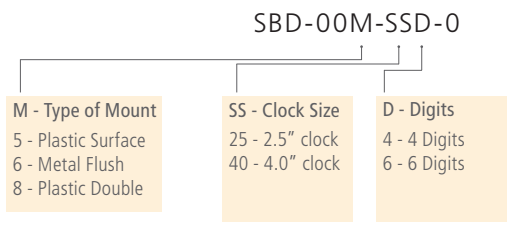

**Example:**  
 SBD-005-256-0                      Plastic Surface Mount, 2.5" (6.35 cm), 6 Digit  
 SBD-006-404-0                      Metal Flush Mount, 4.0" (10.16 cm), 4 Digit

\*specification sheets may change without prior notice

## IP Monitor Software (V2)

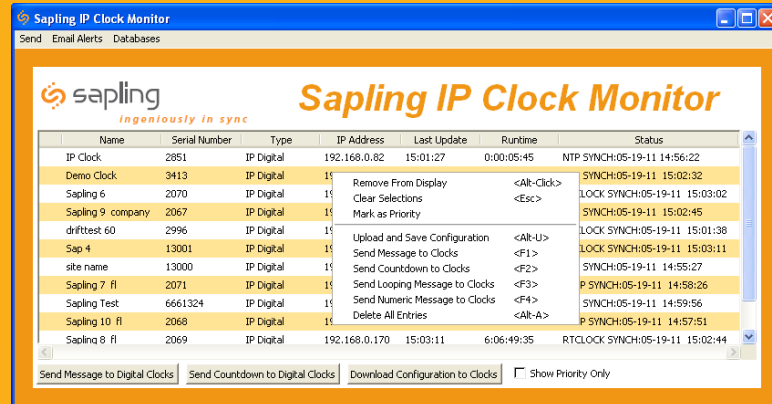

### Highlights

- Allows the user to access all IP clocks in the system through one centralized point
- Quick access to each clock's web interface
- Configure and save settings for one clock or multiple clocks at one time
  - Apply saved settings to any additional clocks thereafter
- Send countdown or message display to any digital clock or clocks in the system
- Easy installation - download directly to your PC
- Set up email alerts
- Organize and arrange clocks in the system by the time of their last update, their runtime, and more
- Does not require intergration with a server
- Comes free of charge with every IP system

\*specification sheets may change without prior notice